

PRODUCT DATA SHEET 413



web: [https:// stairnosingaustralia.com.au](https://stairnosingaustralia.com.au)

Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au



STAIRNOSING 413: This stair nosing designed for rebating and recessed into steps for a flush finish



Sometimes architects and builders choose to have a stair nosing that sits flush to the steps. This means that the nosing must be able to sit in a recess and the stair nosing will sit in the step creating a flush -level finish .

This stair nosing has a 10 mm face or riser,once again it would be wise to ensure the steps are level.



CODE	413
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um
TREAD WIDTH	58mm
FRONT DEPTH	10mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy - Jelly Bean PVC-Mineral PVC
PRODUCT WARRANTY	(As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P4 classification for PVC and P5 classification
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements
FIXING METHOD	Adhesive or screw fixing
APPLICATION	Rebated-recessed into wood concrete.

TYPICAL INSTALLATION

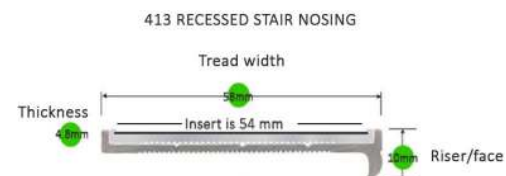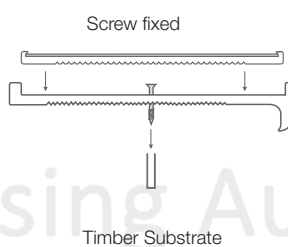

EXAMPLES OF INSERTS



Ripple trim



Carborundum



Mineral PVC



Epoxy



Santoprene

Select the finish
 C=Anodised Silver
 B=Anodised Black
 G=Anodised Sovereign Gold

Select the insert type
 JB [Jelly Bean]
 MIN [Mineral]
 CARB OR EPOXY

Select The colour
 Finish/Colour
 Select the insert type
 Select the insert colour

Example:
 413 B-CARB-BLACK