

PRODUCT DATA SHEET 418



web: <https://stairnosingaustralia.com.au>

Contact : Daphne 0422 803 365

email: daphne@stairnosingaustralia.com.au



STAIRNOSING 418-designed for thick flooring finishes

Stair Nosing Perth offer a comprehensive range of architecturally designed profiles to meet every demand, from heavy duty traffic in railway stations to the more general retail/office use, providing maximum pedestrian safety and WHS requirements.

This stair nosing is has generous rebates at the back and front to allow for thick flooring finishes.


This includes rubber, hardwood flooring, rubber backed vinyl plank, and any flooring acoustic flooring finishes.

Additionally with its 10 mm face it complies with AS 1428 2009 standards




SPECIFICATIONS

PRODUCT	418
BASE MATERIAL	Alloy: 6060, Temper: T5
FINISH	Clear Anodised – 25Um/Anodised Black/Anodised Sovereign Gold
TREAD WIDTH	82 mm
FRONT DEPTH	10 mm
TREAD THICKNESS	4.8mm
INSERT TYPE	Carborundum - Epoxy - Santoprene PVC-Mineral PVC-Ripple trim
PRODUCT WARRANTY	2 Years (As per Stair Nosing Perth's standard warranty conditions)
INSERT SLIP RATING	P4 classification for PVC and P5 classification (Highest available)
CODE COMPLIANCE	AS1428.1-2009 Check floor finish colour for luminance contrast requirements and
FIXING METHOD	LRV [Light Reflective Values]
APPLICATION	Screw fixed/or adhesive Surface mounted on hard floor finishes such as vinyl, rubber, acoustic flooring and drilled plugged and screwed with carpet

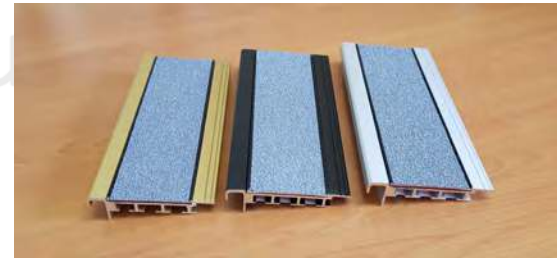

PROFILE 418

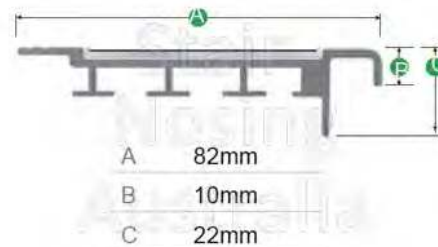

* Insert measures 54mm wide



Santoprene inserts



Ripple trim inserts




Carborundum inserts



Epoxy inserts

TYPICAL INSTALLATION

Screw fixed



Concrete Substrate

How to specify

Select the finish

C=Anodised Clear
B=Anodised Black
SG=Anodised Sovereign Gold

Select the insert type

Carb
Epoxy
Ripple trim
Santoprene

Select the colour

Colour=Grey or Black or Yellow

Example:

418-Black - Epoxy "Black" 418-
Sovereign Gold-
Mineral-"Apatite"